

The EL-2611 is a one-button hand-held transmitter designed for use with Electronics Line 3000's supervised wireless range of receivers. This water-resistant transmitter is designed for panic-button applications and can be worn around the neck. Its large button makes it ideal for the elderly, disabled or sight-impaired users.

Registration

1. Set the receiver to Registration mode.
2. Press the button, making sure that the LED lights up when the button is pressed.
3. Wait for five seconds and press the button again.

Alternatively, the EL-2611 can be registered to the receiver by manually entering the transmitter's serial number.

Low Battery Indication

The EL-2611 indicates a low battery condition using one of the following two methods:

- The LED indicator flashes during transmission.
- A Low Battery signal is sent to the receiver.

On receiving either of these indications, replace the unit.

Technical Specifications

Antenna: Built-in whip

Frequency: 868.35MHz, 433.92MHz or 418MHz FM

Battery Life: 2 years (regular usage in Panic applications)

RFI Immunity: 40V/m

Operating Temperature: 0 - 60°C

Dimensions: 60 x 40 x 15mm

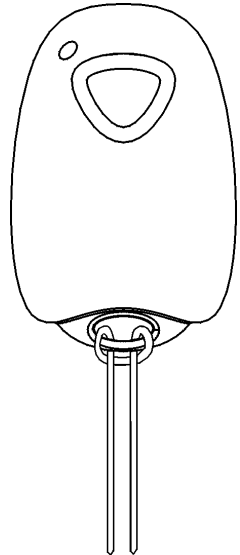


Figure 1: EL-2611
(cord attached)



Electronics Line

Electronics Line 3000 Ltd.: 2 Granit Street, Kiryat Arie, POB 3253, Petah Tikvah 49130 Israel. Tel: (972-3) 918-1333, Fax: (972-3) 922-0831

USA: 5637 Arapahoe Avenue, Boulder, Colorado 80303. Tel: (800) 683-6835, Fax: (303) 938-8062

UK: Unit 7, Levis Trading Estate, Station Road, Stechford, Birmingham B33 9AE. Tel: (44-121) 789-8111, Fax: (44-121) 789-8055

France: ZI-61, rue du Marché Rollay, 94500 Champigny-Sur-Marne. Tel: (33-1) 45.16.19.20, Fax: (33-1) 45.16.19.29

All data is subject to change without prior notice. In no event shall Electronics Line 3000 Ltd. (EL3K) be liable for an amount in excess of EL3K's original selling price of this product, for any loss or damage whether direct, indirect, incidental, consequential or otherwise arising out of any failure of the product. Hereby, Electronics Line 3000 Ltd. declares that this transmitter is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. 868.35MHz frequency transmitters are not intended for use in Bulgaria, Greece, Poland and Slovenia.

